
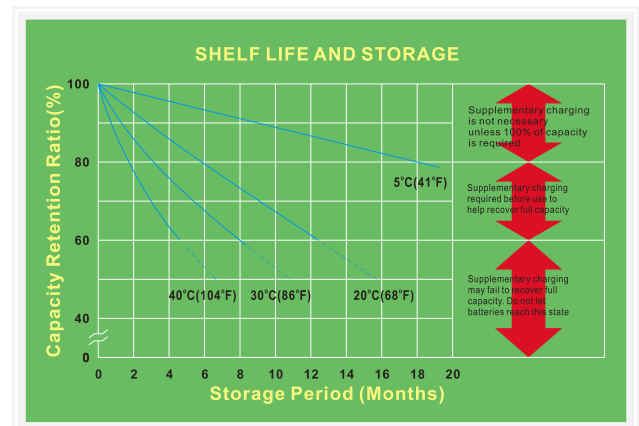
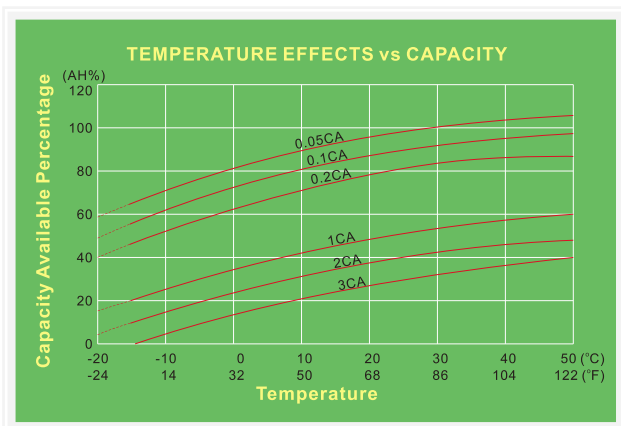
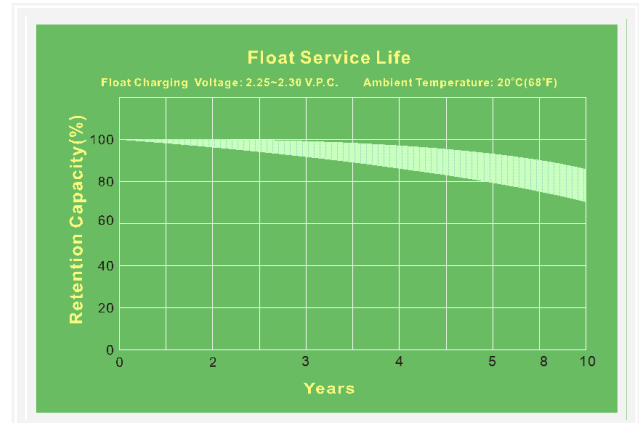



Performance Curves

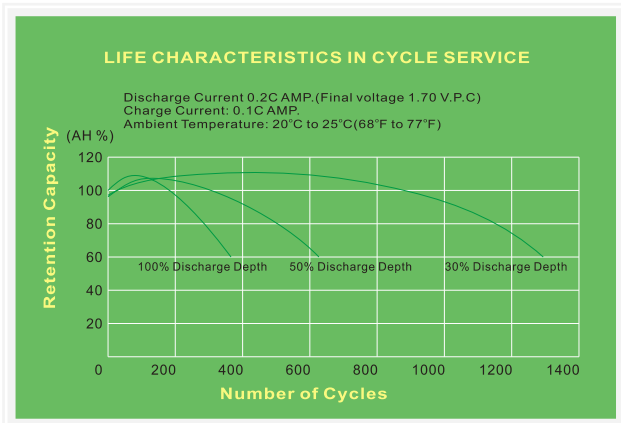

Discharge Characteristics

Constant Current Discharge Characteristics - Amperes @ 25°C (77°F)												
Final VPC	5min	10min	15min	20min	25min	30min	45min	60min	90min	120min	180min	240min
1.80	28.4	20.0	15.4	12.1	11.3	10.6	7.73	6.08	4.15	3.31	2.24	1.95
1.75	31.6	21.5	16.2	12.5	11.6	10.8	7.88	6.17	4.22	3.38	2.27	1.98
1.67	35.7	23.5	17.2	13.0	12.5	11.0	8.03	6.29	4.28	3.41	2.29	2.00

Constant Current Discharge Characteristics - Watts Per Cell @ 25°C (77°F)												
Final VPC	5min	10min	15min	20min	25min	30min	45min	60min	90min	120min	180min	240min
1.80	53.2	37.7	27.6	22.0	18.7	17.0	14.1	11.4	7.80	6.28	4.29	3.77
1.75	59.3	39.4	29.4	22.6	19.4	17.3	14.4	11.6	7.95	6.38	4.33	3.83
1.67	67.1	42.5	32.3	24.3	20.7	18.0	15.1	11.9	8.18	6.56	4.40	3.89



EverExceed | Empower, Energize, Exceed
the Energy you Expect forever

www.exerexceed.com



Headquarter:

Shenzhen EverExceed Industrial Co., Ltd

19 Floor 19, Kechuang Building Hengchangrong High TechPark,
Dezheng Road, Shiyao Bao'an District, Shenzhen.

www.everexceed.com

marketing@everexceed.com

Branch Company:

EverExceed International Company Limited (HK)

19H Maxgrand Plaza No3 Tai Yau St San PO Kong KLN Hongkong

info@everexceed.com

EverExceed Corporation Ltd. (UK)

Unit G25 WaterFront Studios, 1 Dock Road, London, United Kingdom

Europe@everexceed.com